



SUNNY

| Driver | Origin | LED | Origin | Lifetime |
|--------|--------|------|--------|----------|
| MW | Taiwan | CREE | USA | 50000 |

Product Description

Sunny is designed to give a broad spread light distribution which makes this luminaire suitable for gardens, path ways and homes


Basic Data

| | |
|-----------------|------------------------|
| Material | Die Cast Aluminum |
| Finishing | Electrostatic Painting |
| Optics | |
| Weight | 1.8 kg |
| IP | 65 |
| IK | 08 |
| Suspension | Pole Mounted |
| Additional Data | |


Specifications

| Art No. | WAT | CCT | CRI | LED | Angle TL | Ø |
|-----------|-----|------|-----|-----|----------|------|
| 75500-PL- | 45 | 3000 | 75 | 42 | 97 | 3939 |
| 75501-PL- | 45 | 5000 | 75 | 42 | 97 | 4221 |

Dimensions



Light Distribution

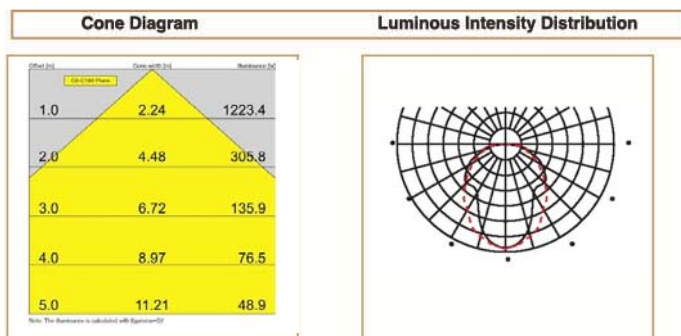

All Luminaires are electrical tested & protection tested according to the standard (IEC 598)