



## Flood

| Driver | Origin | LED  | Origin | Lifetime |
|--------|--------|------|--------|----------|
| MW     | TAIWAN | CREE | USA    | 50000    |

### Product Description

Flood light luminaire in an elegant design is making the installation flexible and convenient, it does not only provide bright and lasting lighting but also reduces maintenance


### Basic Data

|                 |                        |
|-----------------|------------------------|
| Material        | Die Cast Aluminum      |
| Finishing       | Electrostatic Painting |
| Optics          | Lens                   |
| Weight          | 9.6 kg                 |
| IP              | 66                     |
| IK              | 08                     |
| Suspension      | Surface Mounted        |
| Additional Data |                        |


### Specifications

| Art No.   | WAT | CCT  | CRI | LED | Angle | TL   | Ø |
|-----------|-----|------|-----|-----|-------|------|---|
| 72600-PL- | 75  | 3000 | 75  | 24  | 28    | 7084 | _ |
| 72602-PL- | 75  | 5000 | 75  | 24  | 28    | 7521 |   |

### Dimensions

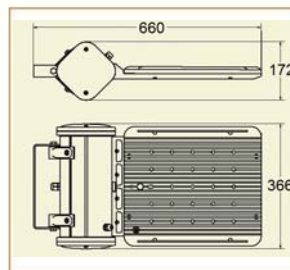

### Light Distribution

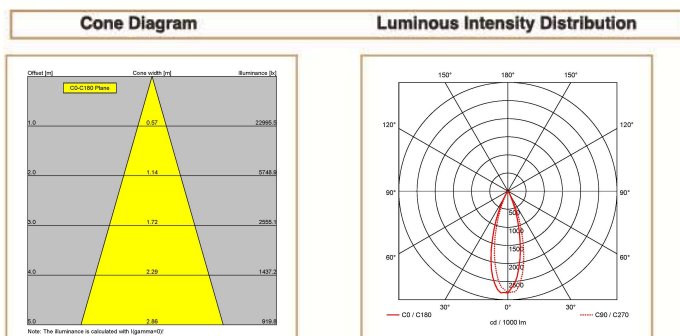

All luminaires are electrical tested & protection tested according to the standard (IEC 598)